

TECHNICAL SPECIFICATION

(from series 2020 on)



BeachTech 2500


Data sheet

Cleaning method		BeachTech 2500
	Patented	Raking-screening-mixed technique
Tractor requirements		
	Recommended power output	59 kW (80 hp) – 74 kW (100 hp) **
	4-wheel-drive	
	Differential lock	
	2-point hitch cat. 1 or 2	
	PTO shaft	6 spline, 1 3/8"
	Power take-off AR NORM	540 (1000 possible) rpm
	1 double-acting circuit of the additional tractor hydraulics in standard operation	
	Power supply	12 V
Dimensions		
Length	In transportation	5,600 mm
	With finisher	6,060 mm
Width	Overall vehicle width	2,500 mm
	Working width	2,500 mm
Height	Overall vehicle height	2,250 mm
	Unloading hopper max.	2,750 mm
Tires		
	Wide-base	520/50-17
Weight		
	Net weight	2,790 kg
	Technically permissible total weight	4,000 kg *
Tank content		
	Hydraulic oil	30 l
Performance		
	Area coverage up to	30,000 m ² / h
Working depth		
	up to	30 cm **
Capacity		
	Collection hopper	2.80 m ³
Speed		
	Operating speed max.	12 km/h **
	Road traffic max.	25 km/h // 40 km/h *

The possibility of changes to the product after the editorial closing date for this publication cannot be ruled out.

* Road transport according to local regulation

** Depending on the soil conditions

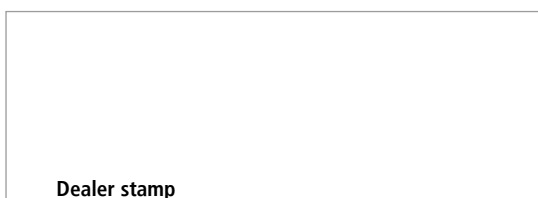

BeachTech

Tel.: +49 7392 900 - 461
 Email: info@beach-tech.com
 www.beach-tech.com